



PC板间隔柱 SPACER SUPPORT

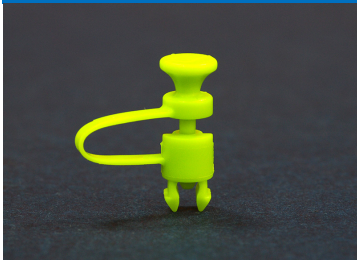


MATERIAL : NYLON 66(UL)
 FLAME CLASS : 94V-0,94V-2
 COLOR : BLACK,NATURAL
 UNIT: mm


用途： 适用NGFF卡于机板上，免工具，易拆卸。



MOUNTING HOLE
 THICKNESS 1.6

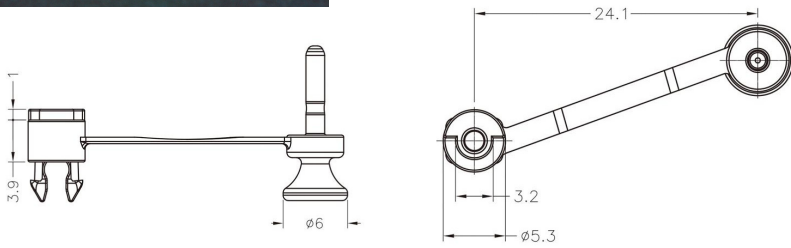

PART NO	C	D	PACKAGE
PCSS-011	24.1	4.0	1000
PCSS-1836	18.27	4.05	1000


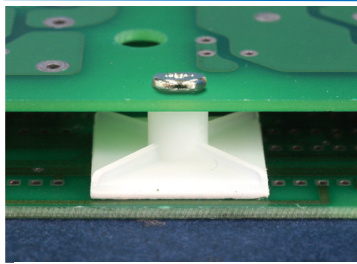


MATERIAL : NYLON 66(UL)
 FLAME CLASS : 94V-0,94V-2
 COLOR : BLACK,NATURAL
 UNIT: mm

用途： 背胶式，用于不能钻孔之机板与PC板间之固定，配合螺丝使用，拆卸方便。

PART NO	A	PACKAGE
PCSS-012	4.2	500
PCSS-013	5.6	500
PCSS-014	6.2	500
PCSS-015	8.2	500
PCSS-016	10.0	500
PCSS-017	11.9	500
PCSS-018	15.1	500
PCSS-019	18.3	500
PCSS-1405	7.2	500
PCSS-1406	13.6	500
PCSS-1407	16.3	500

高度不含背胶及离型纸厚度

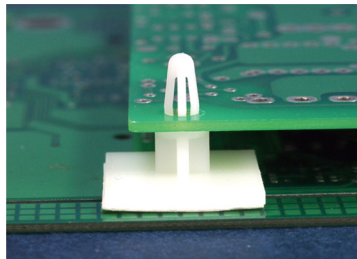
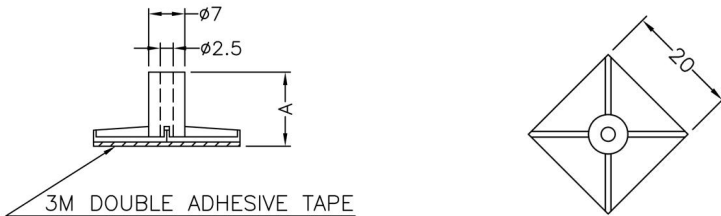


MATERIAL : NYLON 66(UL)
 FLAME CLASS : 94V-0,94V-2
 COLOR : BLACK,NATURAL
 UNIT: mm

用途： 背胶式，用于不能钻孔之机板与PC板间之固定。

高度不含背胶及离型纸厚度

PART NO	A	B	C	E	F	PACKAGE
PCSS-020	4.6	10.0	20.0	1.2~1.7	7.0	500
PCSS-021	5.5	10.0	20.0	1.2~1.7	7.0	500
PCSS-022	7.2	10.0	20.0	1.2~1.7	7.0	500
PCSS-023	9.0	10.0	20.0	1.2~1.7	7.0	500
PCSS-024	12.0	10.0	20.0	1.2~1.7	7.0	500
PCSS-025	15.4	10.0	20.0	1.2~1.7	7.0	500
PCSS-026	18.5	10.0	18.0	1.2~2.0	6.8	500
PCSS-1814	11.8	10.2	18.0	1.6	6.9	500
PCSS-1815	15.34	8.0	17.8	1.6	7.1	500

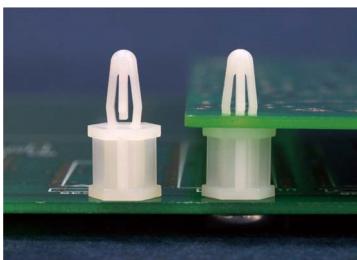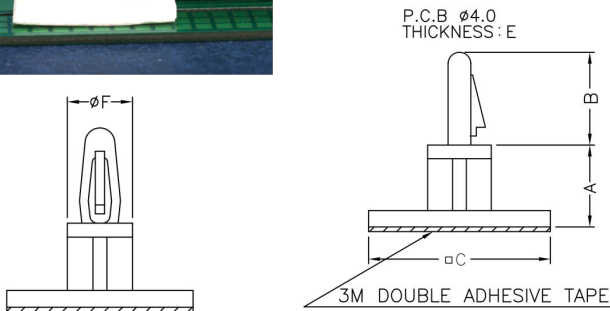

MATERIAL : NYLON 66(UL)
 FLAME CLASS : 94V-0,94V-2
 COLOR : BLACK,NATURAL
 UNIT: mm

用途： 机板部分用M3.5铁板自攻螺丝固定，另一头直接压入PC板。

PART NO	A	B	PACKAGE
PCSS-027	6.4	4.8	1000
PCSS-028	9.5	8.0	1000
PCSS-029	12.7	11.0	1000
PCSS-030	14.0	12.7	1000
PCSS-031	15.0	13.0	1000
PCSS-032	15.9	13.0	1000
PCSS-033	19.1	16.2	1000
PCSS-034	22.2	19.4	1000
PCSS-035	25.4	24.0	1000
PCSS-036	28.6	25.9	1000
PCSS-1396	29.0	25.9	1000
PCSS-1397	20.0	12.0	1000

